

MDS-40SC-30000-1P2N MDS-40HC-40000-1P2N




MOBILITY

DEPENDABILTY

SAFETY

BASIC CONFIGURATIONS:

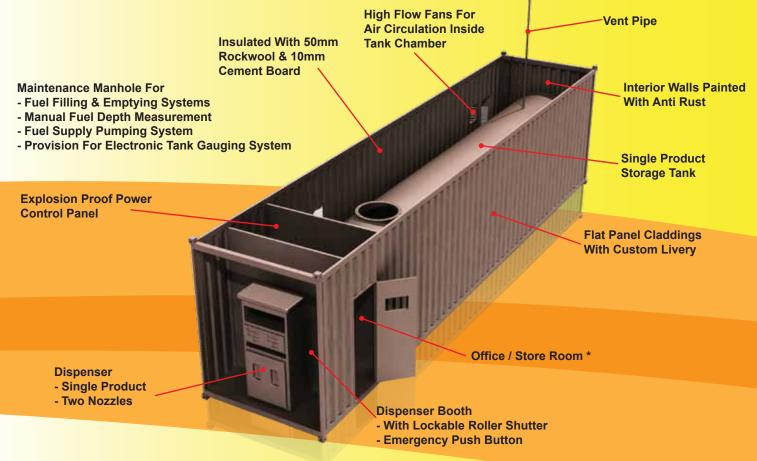

Specifications Models

	MDS-40SC-30000-1P2N-S (F)	MDS-40HC-40000-1P2N-S
Container Dimensions	12.19m Length x 2.44m Width x 2.59m Height	12.19m Length x 2.44m Width x 2.90m Height
Tank Capacity	30,000 Liters	40,000 Liters
Tank Material	Steel Plate To ASTM36, 6mm Wall, 10mm End Plates	
Manhole & Doors	Manhole/Doors/Roller Shutters - Lockable For Security	
Dispenser	One Dispenser, 40 L/min, 1 Product, 2 Nozzles, Accuracy +/- 0.3%	
Dispenser Display	Backlit LCD With Battery Backup, Amount - 8, Volume -8, Unit - 5 Digits	
Nozzle Type	Automatic Nozzle, Available For Unleaded Or Diesel	
Pump Unit	1.5HP Submerged Turbine Pump	
Power Supply	AC 220V, 50 Hz With Earthing Connection	
Electrical Components	Lights/Switches/Fans - Explosion Proof and IP Rated	
Emergency Stop	Push Button At Dispensing Booth To Disconnect Electrical For Entire Unit	
Insulation	Internal Wall Lining With 50mm Rockwool & 10mm Cement Board	
Interior Ventilation	Louvered Doors and Fan Forced Ventilation	
Tank Filling	Fuel Filling and Emptying System Between Tank Truck and Product Tank	
Spill Containments	Fuel Spill Containments for Tank, Manhole, Dispenser	
Surface Protection	Interior/Exterior Painted With Marine Anti Rust Paint	
Company Branding	Company Logo On Side Flat Claddings	

Options

Tank Gauging	Easy To Use With Graphical Display Monitoring System For Oil and Water Levels In Tank	
Overfill Prevention	Prevent Overfilling Of Storage Tank By Providing Positive Shut-off	
Generator	Portable 220/380v 3 Ph, 50 Hz, 5KW Power Diesel Generator	
Cash Deposit Safe *	Robust and Securely Mounted Front Loading Drop Cash System With Anti-Fishing Baffle	
Air Conditioner *	Explosion Proof Wall Mounted Air Contioning For The Office /Store Room	

^{*} Not Available In MDS-40HC-40000-1P2N-S Model



MDS Systems Sdn. Bhd. (862841-V)

Lot 2280 KWS Perindustrian Kg. Baru Balakong, 43300 Seri Kembangan, Selangor Darul Ehsan, Malaysia.

T:+603 8961 6266 F:+603 8961 7266 W:www.mfds-systems.com E:sales@mfds-systems.com